

essentials™

Essential Products for any Installation




essentials™

The Essentials™ product group is just that – ESSENTIAL

In addition to the long established Click® brand of moulded electrical accessory products we have developed and introduced additional accessory ranges, namely Polar™, Curva® & Mode®, as well as decorative metal ranges.

Whilst each of these ranges are unique in their own right, the plate accessory is only part of the complete wiring solution. Hence our range of Essentials™ illustrated herein.

The Essentials™ group of products comprises those items that you will find in a wide variety of installations. Products such as junction boxes, flush mounted switch and socket boxes.

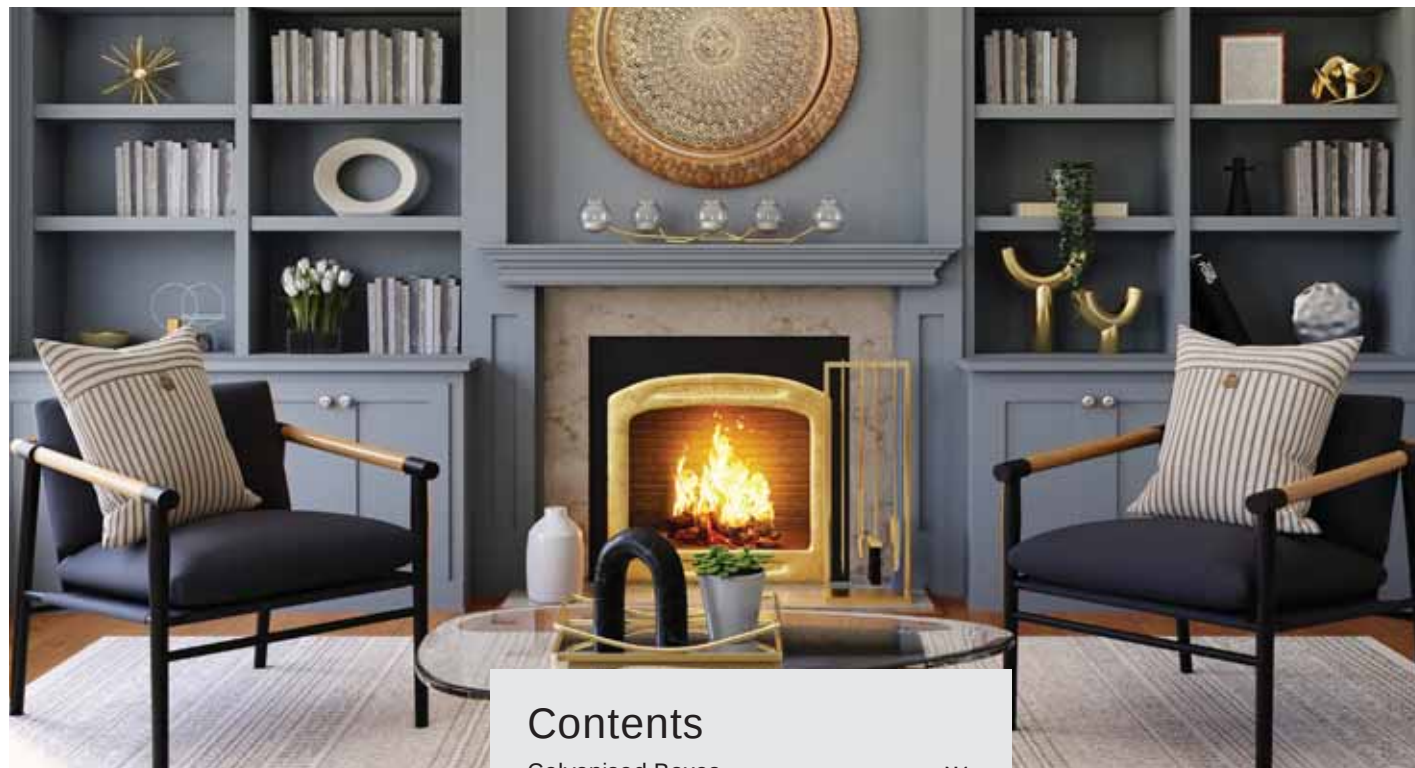

Contents

Galvanised Boxes	N4
Dry Lining Boxes	N7
Longer Fixing Screws	N9
IP66 Weatherproof Accessories	N10
Metal Clad Accessories	N19
Red Accessories	N34
Floor Accessories	N36
Ceiling Accessories	N37
Adaptors & Extension Sockets	N41
Junction & Link Boxes	N42
Connection & Flex Outlet Plates	N44
Fused Main Switch	N45
Rewirable Plug Tops	N46
Plug Top Fuses	N47
Equipotential Bonding Busbar	N48





WA092



WA093

WA094

WA095

WA096

WA097

WA098

Galvanised Steel Back Boxes

WA092 1 Gang 16mm Deep Galvanised Steel K.O. Box
WA093 1 Gang 25mm Deep Galvanised Steel K.O. Box
WA094 2 Gang 25mm Deep Galvanised Steel K.O. Box

WA095 1 Gang 35mm Deep Galvanised Steel K.O. Box
WA096 2 Gang 35mm Deep Galvanised Steel K.O. Box

WA097 1 Gang 47mm Deep Galvanised Steel K.O. Box
WA098 2 Gang 47mm Deep Galvanised Steel K.O. Box

Panel Mounting Gaskets

WA191 1 Gang Panel Mounting Gasket - Metal
WA192 2 Gang Panel Mounting Gasket - Metal

Illuminated Locator Gaskets

WA195WT 1 Gang Illuminated Switch Locator Gasket

Standards: BS 4662
Dimensions (mm): **092:** 70 (W) x 70 (H) x 16 (D) **093:** 70 (W) x 70 (H) x 25 (D) **094:** 135 (W) x 70 (H) x 25 (D)
095: 70 (W) x 70 (H) x 35 (D) **096:** 135 (W) x 70 (H) x 35 (D) **097:** 70 (W) x 70 (H) x 47 (D) **098:** 135 (W) x 70 (H) x 47 (D)
191: 86 (W) x 86 (H) x 6.5 (D) **192:** 146 (W) x 86 (H) x 6.5 (D) **195:** 91.5 (W) x 91.5 (H) x 6.5 (D)



WA671

WA672

WA571

WA572



WA099 | WA370

WA102 | WA375

Galvanised Steel Back Boxes

WA099 1 + 1 35mm Deep Dual Accessory Box
WA102 1 + 2 35mm Deep Dual Accessory Box
WA370 1 + 1 35mm Deep Dual Accessory Box (Deco® Range Only)
WA375 1 + 2 35mm Deep Dual Accessory Box (Deco® Range Only)

WA671 1 Gang 25mm Deep Architrave Box With 60.3mm Hole Centres
WA672 2 Gang 25mm Deep Architrave Box With 120.6mm Hole Centres
WA571 1 Gang 25mm Deep Architrave Galvanised Steel K.O. Box (Deco® Range Only)
WA572 2 Gang 25mm Deep Architrave Galvanised Steel K.O. Box (Deco® Range Only)

Standards: BS 4662 (excluding 571 572)
Cutout sizes (mm): **099:** 158 x 74 **102:** 220 x 74 **370:** 168 x 74 **375:** 228 x 74
571: 87 x 34 x 25 **572:** 148 x 34 x 25 **671:** 73 x 30 x 25 **672:** 135 x 30 x 25
Dimensions (mm): **099:** 158 (W) x 74 (H) x 35 (D) **102:** 220 (W) x 74 (H) x 35 (D) **370:** 168 (W) x 74 (H) x 35 (D) **375:** 228 (W) x 74 (H) x 35 (D)
571: 34 (W) x 87 (H) x 25 (D) **572:** 34 (W) x 148 (H) x 25 (D) **671:** 30 (W) x 73 (H) x 25 (D) **672:** 30 (W) x 135 (H) x 25 (D)



Galvanised Steel Back Boxes

- WA512 2 Tier 47mm Deep K.O. Box
WA518 3 Tier 47mm Deep K.O. Box

GridPro® Flush Mounted Back Boxes

- WA20518 18 Gang GridPro® Flush Mounted Back Box - 56mm Deep
WA20524 24 Gang GridPro® Flush Mounted Back Box - 56mm Deep

Galvanised steel back boxes supplied for flush mounting of the large MiniGrid® plates. Mounting Yoke facilitates pre-assembly of required modules. Fitted with twin earth terminals.

Standards: BS 4662
knockouts (mm): **512:** 7 x Ø20, 3 x Ø25 **518:** 8 x Ø20, 4 x Ø25 **20518 20524:** 10 x Ø20, 6 x Ø25
Dimensions (mm): **512:** 137 (W) x 137 (H) x 47 (D) **518:** 137 (W) x 197 (H) x 47 (D) **20518:** 185 (W) x 197 (H) x 56 (D)
20524: 185 (W) x 255 (H) x 56 (D)



Dry Lining Boxes

- WA087P 1 Gang 35mm Deep Dry Lining Box
WA087PBK 1 Gang 35mm Deep Dry Lining Box
WA088P 2 Gang 35mm Deep Dry Lining Box
WA088PBK 2 Gang 35mm Deep Dry Lining Box
WA106P 1 Gang 47mm Deep Dry Lining Box
WA106PBK 1 Gang 47mm Deep Dry Lining Box
WA107P 2 Gang 47mm Deep Dry Lining Box
WA107PBK 2 Gang 47mm Deep Dry Lining Box
WA108P Round Ceiling 34mm Deep Dry Lining Box

Dry Lining Boxes (Sprung Fixing Lugs)

- WA087SF 1 Gang 35mm Deep Dry Lining Box
WA088SF 2 Gang 35mm Deep Dry Lining Box
WA106SF 1 Gang 47mm Deep Dry Lining Box
WA107SF 2 Gang 47mm Deep Dry Lining Box

'Ezylink' Dry Lining Box Connector

- GA100 'Ezylink' Dry Lining Box Connector
GA100BK 'Ezylink' Dry Lining Box Connector

Suitable for use with WA087P, WA088P, WA106P & WA107P.
Simply connects any combination of Click® dry lining boxes to provide the neatest installation of cavity boxes possible.


Standards: BS 5733 BS 4662 (where applicable)
Cutout sizes (mm): **1 Gang:** 75 (W) x 75 (H) **2 Gang:** 135 (W) x 75 (H) **WA108P:** 65 (Dia)
Dimensions (mm): **1 Gang:** 83 (W) x 83 (H) x 35 (D) **2 Gang:** 143 (W) x 83 (H) x 35 (D)
WA108P: 78 (Dia) x 35 **GA100:** 34 (W) x 17 (D) x 84 (H)



WA4135



WA4147

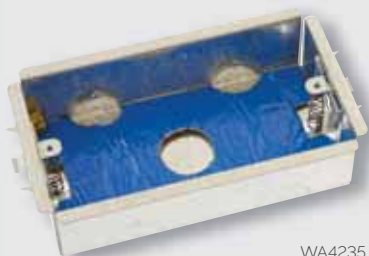

WA4235



WA4247



FlameGuard® Dry Lining Boxes

- WA4135 1 Gang 35mm Deep FlameGuard® Dry Lining Box
- WA4147 1 Gang 47mm Deep FlameGuard® Dry Lining Box
- WA4235 2 Gang 35mm Deep FlameGuard® Dry Lining Box
- WA4247 2 Gang 47mm Deep FlameGuard® Dry Lining Box



The intumescent layer within the box expands as the temperature increases filling the metal box cavity.

FlameGuard® back boxes have been tested and conform to both fire and acoustic BS EN standards. Fire: BS EN 1364-1 Acoustic: BS EN ISO 140-2. Complies with Building Regulations Fire tested up to 90 minutes with the capability of the boxes being mounted back to back.

Standards: BS 4662 BS EN 1364-1 BS EN ISO 10140-2
Cutout sizes (mm): **1 Gang:** 73 (W) x 73 (H) **2 Gang:** 132 (W) x 73 (H)
Dimensions (mm): **1 Gang:** 82 (W) x 82 (H) x 35 (D) **2 Gang:** 142 (W) x 82 (H) x 47 (D)



SP625



SP640



SP650

Security Screws

- SP622 Define® M3.5 Security Screw 22mm Long (Bag 100)
- SP623 Standard M3.5 Security Screw 50mm Long (Bag 100)
- SP625 Standard M3.5 Security Screw 25mm Long (Bag 100)

Require 2mm security allen key/driver.

Longer Fixing Screws

- SP640 Define® M3.5 Dia. 40mm Long Screws (Bag 100)

Screws available in Black Nickel (BN) and Chrome (CH).

- SP650 Standard M3.5 Dia. 50mm Long Screws (Bag 100)

Screws available in Brass (BR), Chrome (CH), Black Nickel (BN) & Matt Black (MB). Suffix code with preferred finish.

- SP675 Standard M3.5 Dia. 75mm Long Screws (Bag 100)

Screws available in Brass (BR), Chrome (CH), Black Nickel (BN) & Matt Black (MB). Suffix code with preferred finish.

Chrome finish may be used with white plate accessories.

Standards: ISO 2010

Understanding the code:

Longer Fixing Screws available in **BR** Brass, **CH** Chrome, **MB** Matt Black and **BN** Black Nickel finishes. Suffix code with preferred finish.



20 Year Warranty

All Aquip66® products are covered by our 20 year warranty against any fault in materials or manufacture experienced at any time within 20 years of the date of supply.

IP66 Weatherproof Sockets & Switches

Aquip66

A comprehensive selection of weatherproof electrical accessory products are featured on the following pages. The polycarbonate construction of the Aquip66® range ensures strength, durability, and long-term performance.

All switch products are of modular construction allowing the installer total freedom in designing customised switching solutions according to on-site requirements.

All socket outlets are tested and approved to BS1363. Unfurnished enclosures are available for use in conjunction with our extensive range of MiniGrid® & GridPro® modules.



OA411AGU | OA401AGU

OA412AGU | OA402AGU

**MINIGRID®**

10A Switch Modules
MiniGrid® switch modules are 10A rated so and feature a simply single screw installation.
Single Screw Feature
Easily and quickly mount modules onto unfurnished yokes by means of a simple single screw fixing.

IP66 Weatherproof Switches

OA411AGU 1 Gang 10AX 2 Way IP66 MiniGrid® Weatherproof Switch

Fitted with a 2-way MiniGrid® module

OA412AGU 2 Gang 10AX 2 Way IP66 MiniGrid® Weatherproof Switch

Fitted with 2 x 2-way MiniGrid® modules

IP66 Weatherproof Unfurnished Switch Enclosures - MiniGrid®

OA401AGU 1 Gang IP66 Unfurnished Weathproof Switch With MiniGrid® Yokes

Modules supplied separately

OA402AGU 2 Gang IP66 Unfurnished Weathproof Switch With MiniGrid® Yokes

Modules supplied separately

Standards: **401 402:** BS 5733 BS EN 60529 **411 412:** BS EN 60669-1 BS EN 60529
Cable Size (mm²): **411 412:** 4 x 1.5 or 2 x 2.5 Knockouts (mm): 20mm
Dimensions (mm): 91 (W) x 106 (H) x 72.5 (D)



OA20021AG | OA20401AG

OA20022AG | OA20402AG

**GRIDPRO®**

20A Switch Modules
GridPro® switch modules are 20A rated so they are ideal for both domestic and commercial applications.
Screw Attachment Feature
Allows easy removal and assembly of the module onto a grid Yoke.

IP66 Weatherproof Switches

OA20021AG 1 Gang 20AX 2 Way IP66 GridPro® Weatherproof Switch

Fitted with a 2-way MiniGrid® module

OA20022AG 2 Gang 20AX 2 Way IP66 GridPro® Weatherproof Switch

Fitted with 2 x 2-way MiniGrid® modules

IP66 Weatherproof Unfurnished Switch Enclosures - GridPro®

OA20401AG 1 Gang IP66 Unfurnished Weathproof Switch With GridPro® Yokes

Modules supplied separately

OA20402AG 2 Gang IP66 Unfurnished Weathproof Switch With GridPro® Yokes

Modules supplied separately

Standards: **20401 20402:** BS 5733 BS EN 60529 **20021 20022:** BS EN 60669-1 BS EN 60529
Cable Size (mm²): **20021 20022:** 3 x 2.5 or 1 x 4
Dimensions (mm): 91 (W) x 106 (H) x 72.5 (D)



IP66 Weatherproof Switched Socket Outlets

- OA035AG 1 Gang 13A DP IP66 Weatherproof Switched Socket
Fitted with a 1 gang Mode® anthracite grey switched socket
- OA036AG 2 Gang 13A DP IP66 Weatherproof Switched Socket (Twin Earth)
Fitted with a 2 gang Mode® anthracite grey switched socket

Standards: BS 1363-2 BS EN 60529
Knockouts (mm): 20mm (Socket) Cable Size (mm²): 3 x 2.5 or 2 x 4
Dimensions (mm): **1 Gang:** 87 (W) x 158 (H) x 90 (D) **2 Gang:** 158 (W) x 158 (H) x 90 (D)



IP66 Weatherproof Unfurnished Wiring Accessory Enclosures

- OA501AG 1 Gang IP66 Unfurnished Weatherproof Wiring
Accessory Enclosure
Accepts standard 1 gang wiring accessories
(supplied separately)
- OA502AG 2 Gang IP66 Unfurnished Weatherproof Wiring
Accessory Enclosure
Accepts standard 2 gang wiring accessories
(supplied separately)

Recess Kits

- OA2RKAG Recess Mounting Kit For 2 Gang IP66 Weatherproof
Unfurnished Unit
Suitable for use with 2 gang weatherproof wiring
accessory enclosures

Standards: BS 5733 BS EN 60529
Knockouts (mm): 20mm (Socket)
Dimensions (mm): **1 Gang:** 87 (W) x 158 (H) x 90 (D) **2 Gang:** 158 (W) x 158 (H) x 90 (D)





IP66 Weatherproof Switched Socket Outlets

OA8CDP036 2 Gang 13A IP66 Weatherproof Passive RCD Switched Socket (Twin Earth)
Fitted with a 2 gang Mode® white RCD switched socket



IP66 Weatherproof Switched Socket Outlets

- OA835T 1 Gang 13A DP IP66 Weatherproof Switched Socket With Neon - Semi-Transparent Cover
Fitted with a 1 gang Mode® anthracite grey switched socket with neon
- OA840T 2 Gang 13A DP IP66 Weatherproof Switched Socket Outboard Rockers With Neons - Semi-Transparent Cover
Fitted with a 2 gang Mode® anthracite grey switched socket outboard rockers with neons

Standards: BS 1363-2 BS EN 60529 O36: BS 1363-2 IEC 62640 BS 7288 BS EN 60529 IEC 61000-6-1 & IEC 61000-6-3
Cable Size (mm²): 3 x 2.5 or 2 x 4
Dimensions (mm): **1 Gang:** 87 (W) x 158 (H) x 90 (D) **2 Gang:** 158 (W) x 158 (H) x 90 (D)



IP66 Weatherproof Fused Connection Units - with Neon

- OA652T 13A DP IP66 Weatherproof Fused Connection Unit - Semi-Transparent Cover
Fitted with a 1 gang Mode® anthracite grey fused switched Connection unit with neon
- OA652AG 13A DP IP66 Weatherproof Fused Connection Unit
Fitted with a 1 gang Mode® anthracite grey fused switched Connection unit with neon

IP66 Weatherproof Fused Connection Units - with LED

- OA2652T 13A DP IP66 Weatherproof Fused Connection Unit - Semi-Transparent Cover
Fitted with a 1 gang Mode® anthracite grey fused switched Connection unit with LED
- OA2652AG 13A DP IP66 Weatherproof Fused Connection Unit
Fitted with a 1 gang Mode® anthracite grey fused switched Connection unit with LED

Standards: BS 1363-4 BS 1362 BS EN 60529
Cable Size (mm²): 3 x 2.5 or 2 x 4
Dimensions (mm): 87 (W) x 158 (H) x 90 (D)

Features & Benefits

Aquip⁶⁶

Robust Construction

- Polycarbonate construction
- High impact resistance
- UV protected against fading
- Ergonomic Design
- Smooth operation of switches
- Neutral modern design suitable for most locations
- Flexible rubber base allows for mounting on most types of uneven surfaces

Multiple Gland Entry Position

- Multiple Knockouts (20mm) for entry from all angles

Weatherproof - IP66

- Offers high level of protection against ingress of water jets and dust

Multiple Switch Configurations

- Designed to fit switched MiniGrid® or GridPro® Modules (depending on which yoke purchased).



MINIGRID®

10A Switch Modules

MiniGrid® switch modules are 10A rated so and feature a simply single screw installation.

Single Screw Feature

Easily and quickly mount modules onto unfurnished yokes by means of a simple single screw fixing.



GRIDPRO®

20A Switch Modules

GridPro® switch modules are 20A rated so they are ideal for both domestic and commercial applications.

Screw Attachment Feature

Allows easy removal and assembly of the module onto a grid Yoke.



20 Year Warranty

All Metal Clad products are covered by our 20 year warranty against any fault in materials or manufacture experienced at any time within 20 years of the date of supply.

Metal Clad Accessories



The products illustrated in this section of the catalogue are finished plates and unfurnished mounting plates.

A comprehensive selection of Metal Clad electrical accessory products are featured on the following pages. Electrophoretically coated plates and back boxes provide a durable and long lasting heavy duty finish to this attractive range of products.

All switch products are of modular construction allowing the installer total freedom in designing customised switching solutions according to on-site needs.

All socket outlets and spurs are tested and approved to BS1363.

Unfurnished plates and mounting boxes are available for use in conjunction with our range of MiniGrid® and New Media® modules.

N20



CL010 | 011 | 025

CL012

CL013



CL019



CL105



For the complete range of MiniGrid® modules please see the MiniGrid® section of the catalogue.

Plates Switches - MiniGrid® c/w 40mm Mounting Box

CL010	10AX 1 Gang 1 Way Plate Switch
CL011	10AX 1 Gang 2 Way Plate Switch
CL011B	10AX 1 Gang 2 Way Plate Switch (No Knockouts)
CL012	10AX 2 Gang 2 Way Plate Switch
CL012B	10AX 2 Gang 2 Way Plate Switch (No Knockouts)
CL013	10AX 3 Gang 2 Way Plate Switch
CL019	10AX 4 Gang 2 Way Plate Switch
CL105	10AX 6 Gang 2 Way Plate Switch
CL025	10AX 1 Gang Intermediate Switch

Interchangeable with WH coloured MiniGrid® modules

Standards: BS EN 60669-1
Back Box Depth (mm): 40 Cable Size (mm²): 4 x 1.5 or 2 x 2.5 Knockouts (mm): 20mm
Dimensions (mm): **1 Gang:** 80 (W) x 80 (H) x 42 (D) **2 Gang:** 140 (W) x 80 (H) x 42 (D)

N21



CL401



CL404



CL402



CL406



CL403



CL426



For the complete range of MiniGrid® modules please see the MiniGrid® section of the catalogue.
CL plates should be used with WH coloured modules.

Unfurnished Plates - MiniGrid® c/w 40mm Mounting Box

CL401	1 Gang MiniGrid® Unfurnished Plate - 1 Aperture
CL402	1 Gang MiniGrid® Unfurnished Plate - 2 Apertures
CL403	1 Gang MiniGrid® Unfurnished Plate - 3 Apertures
CL404	2 Gang MiniGrid® Unfurnished Plate - 2 x 2 Apertures
CL406	2 Gang MiniGrid® Unfurnished Plate - 2 x 3 Apertures
CL426	2 Gang MiniGrid® Unfurnished Plate - 6 In-Line Apertures

Standards: BS 5733 Back Box Depth (mm): 40 Knockouts (mm): 20mm
Dimensions (mm): **1 Gang:** 80 (W) x 80 (H) x 42 (D) **2 Gang:** 140 (W) x 80 (H) x 42 (D)



MINIGRID®

For the complete range of MiniGrid® modules please see the MiniGrid® section of the catalogue. CL plates should be used with WH coloured modules.

2 Tier Unfurnished Plates - MiniGrid® c/w 40mm Mounting Box

CL512 2 Tier MiniGrid® Unfurnished Plate - 12 Apertures - Metal Clad

2 x GR100 Yokes required, see page J7. When using dimmer mounting kit, 50mm deep back box required, see page N32

3 Tier Unfurnished Plates - MiniGrid® c/w 40mm Mounting Box

CL518 3 Tier MiniGrid® Unfurnished Plate - 18 Apertures - Metal Clad

3 x GR100 Yokes required, see page J7. When using dimmer mounting kit, 50mm deep back box required, see page N32

Standards: BS 5733 Back Box Depth (mm): 40 Knockouts (mm): 20mm
Dimensions (mm): **1 Gang:** 80 (W) x 80 (H) x 42 (D) **2 Gang:** 140 (W) x 80 (H) x 42 (D)
512: 148 (W) x 148 (H) x 42 (D) **518:** 148 (W) x 207 (H) x 42 (D)



Switched Safety Shutter Socket Outlets c/w 40mm Mounting Box

CL1035 13A 1 Gang DP Switched Socket

CL1035B 13A 1 Gang DP Switched Socket (No Knockouts)

CL1835 13A 1 Gang DP Switched Socket With Neon

CL1835B 13A 1 Gang DP Switched Socket With Neon (No Knockouts)

CL1036 13A 2 Gang DP Switched Socket (Twin Earth)

CL1036B 13A 2 Gang DP Clean Earth Switched Socket (Twin Earth) (No Knockouts)

CL1840 13A 2 Gang DP Switched Socket With Outboard Rockers & Neons (Twin Earth)

CL1840B 13A 2 Gang DP Switched Socket With Outboard Rockers & Neons (Twin Earth) (No Knockouts)

Safety Shuttered Sockets listed above are only available for sale in the Republic of Ireland.

Standards: BS 1363-2
Back Box Depth (mm): 40 Cable Size (mm²): 3 x 2.5 or 2 x 4 Knockouts (mm): 20mm
Dimensions (mm): **1 Gang:** 80 (W) x 80 (H) x 42 (D) **2 Gang:** 140 (W) x 80 (H) x 42 (D)

N24



CL035

CL036

Switched Socket Outlets c/w 40mm Mounting Box

- CL035 13A 1 Gang DP Switched Socket
- CL035B 13A 1 Gang DP Switched Socket (No Knockouts)
- CL036 13A 2 Gang DP Switched Socket (Twin Earth)
- CL036B 13A 2 Gang DP Switched Socket (Twin Earth) (No Knockouts)
- CL835 13A 1 Gang Switched Socket With Neon Rocker
- CL840 13A 2 Gang Switched Socket With Outboard Neon Rockers (Twin Earth)



CL835

CL840

Switched Socket Outlets c/w 40mm Mounting Box

- CL1836 13A 2 Gang DP Switched Socket With Outboard Rockers (Twin Earth)
- CL1836B 13A 2 Gang DP Switched Socket With Outboard Rockers (Twin Earth) (No Knockouts)

Standards: BS 1363-2
Back Box Depth (mm): 40 Cable Size (mm²): 3 x 2.5 or 2 x 4 Knockouts (mm): 20mm
Dimensions (mm): **1 Gang:** 80 (W) x 80 (H) x 42 (D) **2 Gang:** 140 (W) x 80 (H) x 42 (D)

N25




CL785

CL786

Switched Sockets With USB Outlets c/w 40mm Mounting Box

- CL785 13A 1 Gang Switched Socket Outlet With Type A & C USB (4A) Outlets (Twin Earth)
- CL786 13A 2 Gang Switched Socket Outlet With Type A & C USB (4.2A) Outlets (Twin Earth)

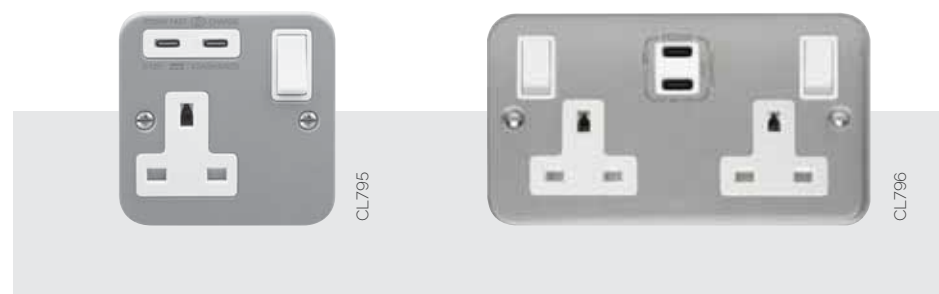

CL795

CL796

Switched Sockets With USB Outlets c/w 40mm Mounting Box

- CL795 13A 1 Gang Switched Socket Outlet With Twin Type C USB (4.2A) Outlets (Twin Earth)
- CL796 13A 2 Gang Switched Socket Outlet With Twin Type C USB (4.2A) Outlets (Twin Earth)

Standards: BS 1363-2: 2016 •A1: 2018, BS EN IEC 62368-1, BS EN 62680-1-1
795 796: BS 1363-2: 2016 •A1: 2018, EN IEC 62368-1, EN IEC 62680-1-3, EN IEC 61000-6-1, EN 61000-6-3
Back Box Depth (mm): 40 Cable Size (mm²): 3 x 2.5 or 2 x 4 Knockouts (mm): 20mm
Dimensions (mm): **1 Gang:** 80 (W) x 80 (H) x 42 (D) **2 Gang:** 140 (W) x 80 (H) x 42 (D)



CL030

CL032

Unswitched Socket Outlet c/w 40mm Mounting Box

CL030 13A 1 Gang Unswitched Socket

CL032 13A 2 Gang Unswitched Socket (Twin Earth)



CL660

CL675

Two keys provided (Spare keys available: SP660)

Lockable Switches c/w 40mm Mounting Box

CL660 20A DP Key Lockable Switch
CL660B 20A DP Key Lockable Switch (No Knockouts)

Lockable Socket Outlets c/w 40mm Mounting Box

CL675 13A 1 Gang DP Key Lockable Socket With Neon
CL675B 13A 1 Gang DP Key Lockable Socket With Neon (No Knockouts)

Standards: BS 1363-2 **660 660B 675 675B**: BS EN 60669-1
Back Box Depth (mm): 40 Cable Size (mm²): 3 x 2.5 or 2 x 4
Dimensions (mm): **1 Gang**: 80 (W) x 80 (H) x 42 (D) **2 Gang**: 140 (W) x 80 (H) x 42 (D)



CL049 | 050

CL051

Fused Connection Units With Optional Flex Outlet c/w 40mm Mounting Box

CL049 3A Fused Connection Unit
CL050 13A Fused Connection Unit
CL051 13A DP Switched Fused Connection Unit
CL051B 13A DP Switched Fused Connection Unit (No Knockouts)



CL052

CL053

CL1252

Fused Connection Units With Optional Flex Outlet c/w 40mm Mounting Box

CL052 13A DP Switched Fused Connection Unit With Neon
CL053 13A Fused Connection Unit With Neon
CL1252 13A DP Key Operation Fused Connection Unit With Neon & Lockable Fuse Drawer

Standards: BS EN 60669-1 **Fused Connection Units**: BS 1363-4 BS 1362
Back Box Depth (mm): 40 **45A**: 50
Cable Size (mm²): 3 x 2.5 or 2 x 4 **049**: 4 x 2.5 or 2 x 4 **45A**: 1 x 16 Knockouts (mm): 20mm
Dimensions (mm): **1 Gang**: 80 (W) x 80 (H) x 42 (D) **2 Gang**: 140 (W) x 80 (H) x 42 (D) **200 201**: 80 (W) x 80 (H) x 52 (D)
202 203: 80 (W) x 140 (H) x 52 (D)



CL200



CL201

50A Switches c/w 50mm Mounting Box

CL200 50A 1 Gang DP Switch

CL201 50A 1 Gang DP Switch With Neon



CL202



CL203

50A Switches c/w 50mm Mounting Box

CL202 50A 2 Gang (Vertical) DP Switch

CL203 50A 2 Gang (Vertical) DP Switch With Neon

Standards: BS EN 60669-1 BS 1363-4 BS 1362
Back Box Depth (mm): 50 Cable Size (mm²): 1 x 16 Knockouts (mm): 20mm
Dimensions (mm): **200** 201: 80 (W) x 80 (H) x 52 (D) **202 203:** 80 (W) x 140 (H) x 52 (D)



CLRCDP036

RCD Socket Outlets c/w 40mm Mounting Box

CLRCDP036 13A 2 Gang Passive RCD Switched Socket Outlet (Twin Earth)



CL022



CL023

20A Control Switches with Optional Flex Outlet c/w 40mm Mounting Box

CL022 20A DP Switch

CL023 20A DP Switch With Neon

Standards: BS EN 60669-1
RCD: BS 1363-2 IEC 62640 BS 7288 SASO 2203 IEC 61000-6-1 & IEC 61000-6-3
Back Box Depth (mm): 40 Cable Size (mm²): 3 x 2.5 or 2 x 4 Knockouts (mm): 20mm
Dimensions (mm): **1 Gang:** 80 (W) x 80 (H) x 42 (D) **2 Gang:** 140 (W) x 80 (H) x 42 (D)

N30




Blank Plates

- CL060 1 Gang Blank Plate
- CL061 2 Gang Blank Plate

Standards: BS 5733
Dimensions (mm): **060:** 80 (W) x 80 (H) x 4 (D) **061:** 140 (W) x 80 (H) x 4 (D)

N31

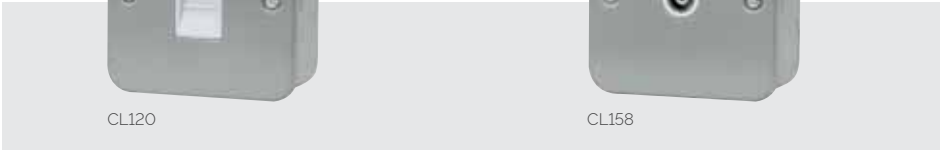

Telephone & Coaxial Socket Outlets c/w 40mm Mounting Box

- CL120 Single Telephone Outlet - Master
- CL158 Single Isolated Coaxial Outlet

Isolated outlets will filter out any interference, if a 2 way signal is required, i.e. for use with satellite hard wire extensions, then a non-isolated outlet is required.



Unfurnished Plates - New Media™ c/w 40mm Mounting Box

- CL311 1 Gang New Media™ Unfurnished Plate - 2 Apertures
- CL312 2 Gang New Media™ Unfurnished Plate - 4 Apertures

Standards: BS 5733
Back Box Depth (mm): 40
Knockouts (mm): 20mm
Dimensions (mm): **1 Gang:** 80 (W) x 80 (H) x 42 (D) **2 Gang:** 140 (W) x 80 (H) x 42 (D)



Mounting Boxes

- CL083 1 Gang 40mm Deep Mounting Box
- CL084 2 Gang 40mm Deep Mounting Box
- CL085 1 Gang 40mm Deep Mounting Box (No Knockouts)
- CL086 2 Gang 40mm Deep Mounting Box (No Knockouts)
- CL087 1 Gang 50mm Deep Mounting Box
- CL088 2 Gang 50mm Deep Mounting Box
- CL089 2 Gang 50mm Deep 2 Tier Mounting Box
- CL089B 2 Gang 50mm Deep 2 Tier Mounting Box (No Knockouts)
- CL090 2 Gang 50mm Deep 3 Tier Mounting Box
- CL090B 2 Gang 50mm Deep 3 Tier Mounting Box (No Knockouts)

Standards: BS 4662 **089 089B 090 090B**: BS 5733
 Dimensions (mm): **083 085**: 76 (W) x 76 (H) x 40 (D) **084 086**: 136 (W) x 76 (H) x 40 (D) **087**: 76 (W) x 76 (H) x 50 (D) **088**: 136 (W) x 76 (H) x 50 (D)
089: 137 (W) x 136 (H) x 50 (D) **090**: 137 (W) x 196 (H) x 50 (D)



Red Accessories & Floor Accessories



The products illustrated in this section of the catalogue are finished plates and unfurnished mounting plates.

A selected range of special purpose
moulded & Stainless Steel accessories.



WA037RD

WA179



WA180

Socket Outlets

- WA037RD 13A 2 Gang DP Switched Socket Clean Earth
WA179 13A 2 Gang Unswitched Socket (Twin Earth)
WA180 13A 2 Gang DP Switched Socket (Twin Earth)



WA081RD



WA185

Moulded Surface Pattress Boxes - Urea

- WA081RD 1 Gang 25mm Deep Surface Pattress Box
WA185 2 Gang 25mm Deep Surface Pattress Box

Standards: BS 4662 **13A**: BS 1363-2
Back Box Depth (mm): **13A**: 25 Cable Size (mm²): **13A**: 3 x 2.5 or 2 x 4
Dimensions (mm): **081**: 87 (W) x 87 (W) x 30 (D) **2 Gang**: 146 (W) x 86 (H) x 11 (D) **185**: 147 (W) x 87 (W) x 30 (D)




WA049RD

WA056RD

Fused Connection Units


- WA049RD 3A Fused Connection Unit
WA056RD 3A DP Switched Fused Connection Unit



WA401RD



WA403RD



WA402RD

MINIGRID®

For the complete range of compatible modules, see the dedicated MiniGrid® section, page J18.

Unfurnished Plates - MiniGrid®

- WA401RD 1 Gang MiniGrid® Unfurnished Plate - 1 Aperture
WA402RD 1 Gang MiniGrid® Unfurnished Plate - 2 Apertures
WA403RD 1 Gang MiniGrid® Unfurnished Plate - 3 Apertures

Standards: BS 5733 **049 056**: BS 1363-4 BS 1362
Back Box Depth (mm): Dependent On Module Fitted **049 056**: 25 Cable Size (mm²): **049 056**: 4 x 2.5 or 2 x 4
Dimensions (mm): 86 (W) x 86 (H) x 11 (D)

N36



13A Floor socket outlets BS Kitemark Approved

Floor Socket Outlets

FS030SS 13A 1 Gang Floor Socket - Stainless Steel
FS032SS 13A 2 Gang Floor Socket - Stainless Steel



Unfurnished Floor Plates - For Use With New Media™ Modules

FS311SS 1 Gang New Media™ Unfurnished Floor Plate - 2 Apertures
FS312SS 2 Gang New Media™ Unfurnished Floor Plate - 4 Apertures

Standards: **030 032:** BS 1363-2 **311 312:** BS 5733
Back Box Depth (mm): **030 032:** 35 **311 312:** Dependent On Modules Fitted
Cable Size (mm²): **030 032:** 3 x 2.5 or 2 x 4
Dimensions (mm): **1 Gang:** 86 (W) x 93 (D) x 5 (H) **2 Gang:** 146 (W) x 93 (D) x 5 (H)

N37



Pull Cord Switches

PRW213 50A DP Round Pull Cord Switch With Mechanical 'On/Off', Neon & Pattress (Twin Terminal Screws) C/W Pattress

PRW213



Pull Cord Switches

PRW208 10A 3 Pole Fan Isolation Pull Cord Switch
PRW210 45A DP Pull Cord Switch With Mechanical 'On/Off' & Neon
PRW211 50A DP Pull Cord Switch With Mechanical 'On/Off' & Neon (Twin Terminal Screws)

Decorative covers available for PRC210, see overleaf



Pull Cord Switches

PRC009 10AX 2 Way Ceiling Pull Cord Switch
PRC210 10AX 2 Way Pull Cord Switch
PRC216 16A DP Pull Cord Switch With Neon

Standards: BS EN 60669-1
Cable Size (mm²): **211 213:** 1 x 25 **009 208 PRC210 216:** 2 x 1.5 or 1 x 2.5 **PRW210:** 1 x 6
Dimensions (mm): **009:** 76 (Dia) x 51.5 **PRC210 216:** 70 (Dia) x 42 (D)
208 PRW210 211: 86 (W) x 86 (H) x 43 (D) **213:** 100 (Dia) x 77 (D)



CV210CH

PRC210 + CV210CH

Pull Cord Switches

CV210CH Polished Chrome Cover for PRC210
CV210SC Satin Chrome Cover for PRC210



PRC1440

PRC1440RD

Pendant Sets & Ceiling Rose

PRC1440 6A 4 Pole Quick-Connect Ceiling Rose, Plug & Cover
PRC1440RD 6A 4 Pole Quick-Connect Ceiling Rose, Plug & Cover - Red

Standards: **1440:** BS 6972 BS 5733 **210:** BS 5733
Cable Size (mm²): 2 x 1.5
Dimensions (mm): **210:** 76 (Dia) x 44 (D) **1440:** 70 (Dia) x 43 (D)



PRC006

PRC008

PRC1015

PRC017

PRC1031 | PRC1033



T2 Batten Lampholders

PRC006 T2 BC Batten Lampholder Straight Skirt
PRC007 T2 BC Batten Lampholder H.O. Skirt
PRC008 T2 BC Angled Batten Lampholder Straight Skirt

T2 Loop-In Batten Lampholders

PRC015 T2 BC Loop-In Batten Lampholder With Straight Skirt
PRC016 T2 BC Loop-In Batten Lampholder With H.O. Skirt
PRC017 T2 BC Loop-In Angled Batten Lampholder With H.O. Skirt

Safety Batten Lampholders

PRC1015 T2 BC Loop-In Batten Safety Lampholder With Straight Skirt
PRC1016 T2 BC Loop-In Batten Safety Lampholder With H.O. Skirt
PRC1017 T2 BC Loop-In Angled Batten Safety Lampholder With H.O. Skirt

Pendant Sets & Ceiling Rose

PRC031 6" T2 BC Ceiling Pendant Set
PRC033 9" T2 BC Ceiling Pendant Set
PRC038 6" T2 BC TRS Pendant Set

Safety Pendant Sets & Ceiling Rose

PRC1031 6" T2 BC Ceiling Safety Pendant Set
PRC1033 9" T2 BC Ceiling Safety Pendant Set

For our full range of wiring accessories, see the Curva®, Polar™ and Mode® sections of this catalogue.

Standards: **006 007 008:** BS EN 61184 **015 016 017 031 033 038:** BS EN 61184 BS 67
1015 1016 1017 1031 1033: BS EN 61184 BS EN IEC 60598-2-1 BS 67
Cable Size (mm²): 2 x 1.5 Dimensions (mm): **006 008:** 65 (Dia) x 62 **007:** 65 (Dia) x 66
015 1015: 86 (Dia) x 74 **016 1016:** 86 (Dia) x 80 **017 1017:** 86 (Dia) x 94 **031 033 038 1031 1033:** 86 (Dia) x 30

N40



T2 Push-Bar Lampholders

PRC005 T2 BC ½" Thread Entry Cord Grip Switched Lampholder Straight Skirt
PRC012 T2 BC 10mm Thread Entry Cord Grip Switched Lampholder Straight Skirt
Lampholder with straight skirt and push-bar

PRC005 | 012



Pendant Sets & Ceiling Rose

PRC001 Ceiling Rose Fitted With Clear Polycarbonate Base
PRC029 6" T2 Pendant Set Without Rose



T2 Lampholders

PRC003 T2, BC Cord Grip Pendant Lampholder
PRC020 T2 BC Cord Grip TRS Lampholder
PRC004 T2 BC ½" Thread Entry Cord Grip Lampholder Straight Skirt
PRC011 T2 BC 10mm Thread Entry Cord Grip Lampholder Straight Skirt

Standards: BS EN 61184 **001**: BS 67 Cable Size (mm²): 0.75 **001**: 2 x 1.5
Dimensions (mm): **001**: 86 (Dia) x 30 **005 012**: 44 (Dia) x 87 **003**: 36 (Dia) x 56 **004 011**: 36 (Dia) x 58 **020 029**: 51 (Dia) x 84

N41



Cable not included

Extension Sockets And Leads

ES001 13A 1 Gang Trailing Socket With Neon ES003 13A 4 Gang Trailing Socket With Neon
ES002 13A 2 Gang Trailing Socket With Neon ES008 13A 3 Gang Trailing Socket With Neon



Multiplugs And Adaptors

PA040 1 Amp Fused Shaver Adaptor - White
PA041A 13A 2 Way Resilient Adaptor - White
PA042A 13A Fused 3 Way Adaptor - White

Standards: BS 1363-2 **040**: BS 1363 BS 646 **041**: BS 1363/A **042**: BS 1363/A BS 1362
Dimensions (mm): **001**: 96 (W) x 62 (D) x 27 (H) **002**: 150 (W) x 62 (D) x 27 (H) **003**: 258 (W) x 62 (D) x 27 (H)
008: 200 (W) x 62 (D) x 27 (H) **040**: 49 (W) x 25.5 (D) x 50 (H) **041**: 50 (W) x 48.5 (D) x 50 (H) **042**: 50 (W) x 48.5 (D) x 68 (H)

N42



Junction Boxes - White

- WA070 5A Junction Box Selective Entry 4 Terminal
- WA071 20A Junction Box Selective Entry 4 Terminal
- WA072 30A Junction Box Selective Entry 3 Terminal
- WA073 20A Junction Box Selective Entry 6 Terminal
- WA074 20A Junction Box 58mm Diameter 4 Terminal

Junction Boxes - Brown

- WA075 5A Junction Box Selective Entry 4 Terminal
- WA076 20A Junction Box Selective Entry 4 Terminal
- WA077 30A Junction Box Selective Entry 3 Terminal
- WA078 20A Junction Box Selective Entry 6 Terminal
- WA079 20A Junction Box 58mm Diameter 4 Terminal

Standards: BS EN 60670-1 BS EN 60670-22
Cable Size (mm²): **070 075:** 2 x 1.5 **071 076:** 4 x 1.5 **072 077:** 2 x 4 **073 078:** 4 x 1.5 **074 079:** 4 x 1.5
Dimensions (mm): **070 075:** 60 (Dia) x 23 **071 076:** 80 (Dia) x 30 **072 077:** 90 (Dia) x 35
073 078: 86 (Dia) x 30 **074 079:** 55 (Dia) x 25

N43



Junction Boxes

- WA220 60A Junction Box 3 Terminal - White
- WA222 60A Junction Box 3 Terminal - Brown
- UK Design Registration No. 3009706

Link Boxes

- WA227 100A 1 Pole 5 x 35mm² Link Box - Black
- WA228 100A 2 Pole 5 x 35mm² Link Box - Black

Connectable Link Boxes

- WA315BK 100A 1 Pole 5 x 35mm² Link Box - Black
- WA315BL 100A 1 Pole 5 x 35mm² Link Box - Blue
- WA315BR 100A 1 Pole 5 x 35mm² Link Box - Brown
- WA315GN 100A 1 Pole 5 x 35mm² Link Box - Green
- WA315GY 100A 1 Pole 5 x 35mm² Link Box - Grey
- WA315PK 100A 1 Pole 5 x 35mm² Link Box - Pink

Standards: BS 5733 **315:** EN 60998-1, EN 60998-2-1
Cable Size (mm²): **220 222:** 1 x 25 **227 228:** 1 x 35 **315:** 2.5 to 35
Dimensions (mm): **220 222:** 153 (W) x 91 (D) x 35 (H) **227:** 66 (W) x 49 (D) x 34 (H)
228: 115 (W) x 65 (D) x 55 (H) **315:** 70 (W) x 51 (D) x 43 (H)



45A Cooker Connection Plates

CMA215 45A 1 Gang Cooker Connection Plate
PRW215 45A 1 Gang Cooker Connection Plate
UK Design Registration No. 3015175

PRW217 45A Easyfit Dual Appliance Outlet Plate
UK Design Registration No. 3015175
Utilises standard 1 gang back box 25mm deep minimum.

Pattress Box for PRW217 - Urea

PRW218 35mm Deep Pattress Box For Use With PRW217

Standards: BS 5733
Back Box Depth (mm): 35 **217:** 25 Cable Size (mm²): **215:** 2 x 10 **217:** 1 x 10
Dimensions (mm): **215:** 86 (W) x 86 (H) x 22.5 (D) **217:** 85 (W) x 130 (H) x 27 (D) **218:** 85 (W) x 130 (H) x 37.5 (D)



Fuse Manufacturer				
Rating	Bussmann	Lawson	MEM	GE
40A	40KR85	ME40	404R	RHF40
45A	45KR85	ME45	454R	-
50A	50KR85	ME50	504R	RHF50
60A	60KR85	ME60	604R	RHF60
70A	70KR85	ME70	-	-
80A	80KR85	ME80	804R	RHF80
100A	100KR85	ME100	-	-

80A and 100A variants are supplied with an 80A Bussmann fuse as standard. However, the following fuses will fit:

Fused Main Switch

DB700 80A Fused Main Switch (80A HRC Fuse Fitted)
DB701 80A Fused Main Switch (80A HRC Fuse Fitted) - Lockable
DB750 100A Fused Main Switch (80A HRC Fuse Fitted)
DB751 100A Fused Main Switch (80A HRC Fuse Fitted) - Lockable
DB981 Elongated Cable Shroud (Packaged Individually)

Standards: **700 701 750 751:** BS 60947 3
Cable Size (mm²): **700 701:** 25 & 16 **750 751 791 981:** 35 & 25
Dimensions (mm): **700 701:** 127.5 (W) x 53.5 (D) x 80.5 (H) **750 751:** 133 (W) x 60 (D) x 101 (H) **981:** 80 (W) x 90 (D) x 45 (H)



Round Pin Unfused Plug Tops

- PA165 2A Round Pin Plug - White
- PA175 2A Round Pin Plug - Black
- PA166 5A Round Pin Plug - White
- PA167 15A Round Pin Plug - White
- PA176 5A Round Pin Plug - Black
- PA177 15A Round Pin Plug - Black

13A UK Fast Grip Resilient Plug Tops (BS1363/A)


- PA301 13A Plug Top (13A Fused) Fast Grip - White
- PA302 13A Plug Top (3A Fused) Fast Grip - White
- PA303 13A Plug Top (5A Fused) Fast Grip - White
- PA310 13A Plug Top (13A Fused) Fast Grip - Black
- PA311 13A Plug Top (3A Fused) Fast Grip - Black
- PA312 13A Plug Top (5A Fused) Fast Grip - Black
- PA340TR 13A Plug Top (13A Fused) Fast Grip - Transparent

13A UK Bar Grip Resilient Plug Tops (BS1363/A)

- PA320 13A Plug Top (13A Fused) Bar Grip - White
- PA321 13A Plug Top (3A Fused) Bar Grip - White
- PA322 13A Plug Top (5A Fused) Bar Grip - White
- PA330 13A Plug Top (13A Fused) Bar Grip - Black
- PA331 13A Plug Top (3A Fused) Bar Grip - Black
- PA332 13A Plug Top (5A Fused) Bar Grip - Black

Non-Standard Resilient Plug Tops (BS1363/A)

- PA380RD 13A Fused Non-Standard Plug - Red
 - PA380WH 13A Fused Non-Standard Plug - White
- For use with non-standard Click® Mode® sockets CMA935 and CMA936, see page F18.

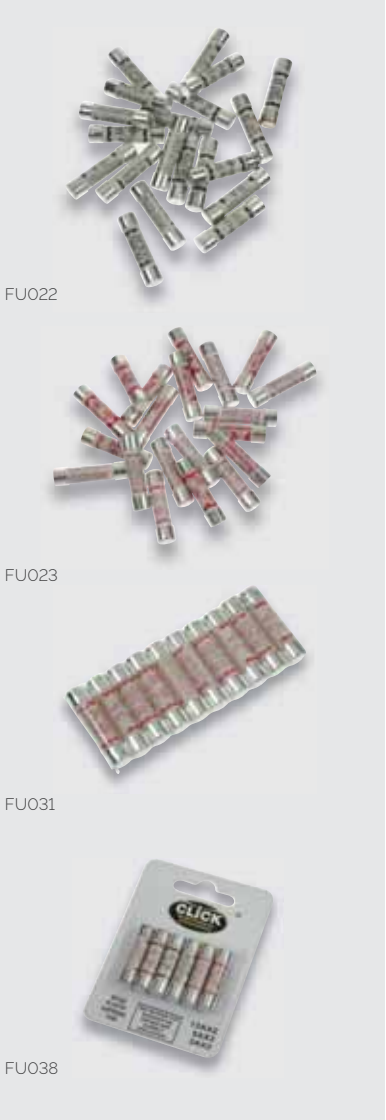

BS 1362 Approved Plug Top Fuses (Bulk Packed)

- FU021 13A Cartridge Fuse (Bulk Bag of 1000 Pcs)
- FU022 5A Cartridge Fuse (Bulk Bag of 1000 Pcs)
- FU023 3A Cartridge Fuse (Bulk Bag of 1000 Pcs)

BS 1362 Approved Plug Top Fuses (Boxed)

- FU030 Box of 100 13A Fuses (10 X Sachets of 10)
- FU031 Box of 100 3A Fuses (10 X Sachets of 10)
- FU032 Box of 100 5A Fuses (10 X Sachets of 10)

BS 1362 Approved Plug Top Fuses (Carded)

- FU035 Card of 4 X 13A Fuses
- FU036 Card of 4 X 3A Fuses
- FU037 Card of 4 X 5A Fuses
- FU038 Card of 6 X Assorted Fuses (2 X 13A, 2 X 5A & 2 X 3A)

Standards: BS 1363/A BS 1362 **Round Pin:** BS 546 Cable Size (mm²): 1.5
Dimensions (mm): 49.5 (W) x 21 (D) x 49.5 (H) **165:** 32 (W) x 18.5 (D) x 30.5 (H) **175:** 32 (W) x 30.5 (D) x 18.5 (H)
166 176: 41 (W) x 19.5 (D) x 45 (H) **167 177:** 52.5 (W) x 23 (D) x 52 (H)

Standards: BS 1362

N48



Recess Mounting

- EBB118R 18 Way Recess Mounted EBB
- EBB118S 18 Way Surface Mounted EBB

- EBB240R 40 Way Recess Mounted EBB
- EBB240S 40 Way Surface Mounted EBB

Also see Supplementary Equipotential Bonding Connection Points on page F16

Standards: BS EN 61439-1 HTM06-01 IEC 60364-7-710 BS 7671
Dimensions (mm): **118R**: 253 (W) x 253 (H) x 5.2 (D) **240R**: 255 (W) x 412 (H) x 5.2 (D)
118S: 240.4 (W) x 240.5 (H) x 5.2 (D) **240S**: 240.4 (W) x 397.4 (H) x 5.2 (D)